


# PRODUCT DATA SHEET

## SHC5: Standard Hollow Core Door (5-Ply)

### SPECIFICATIONS

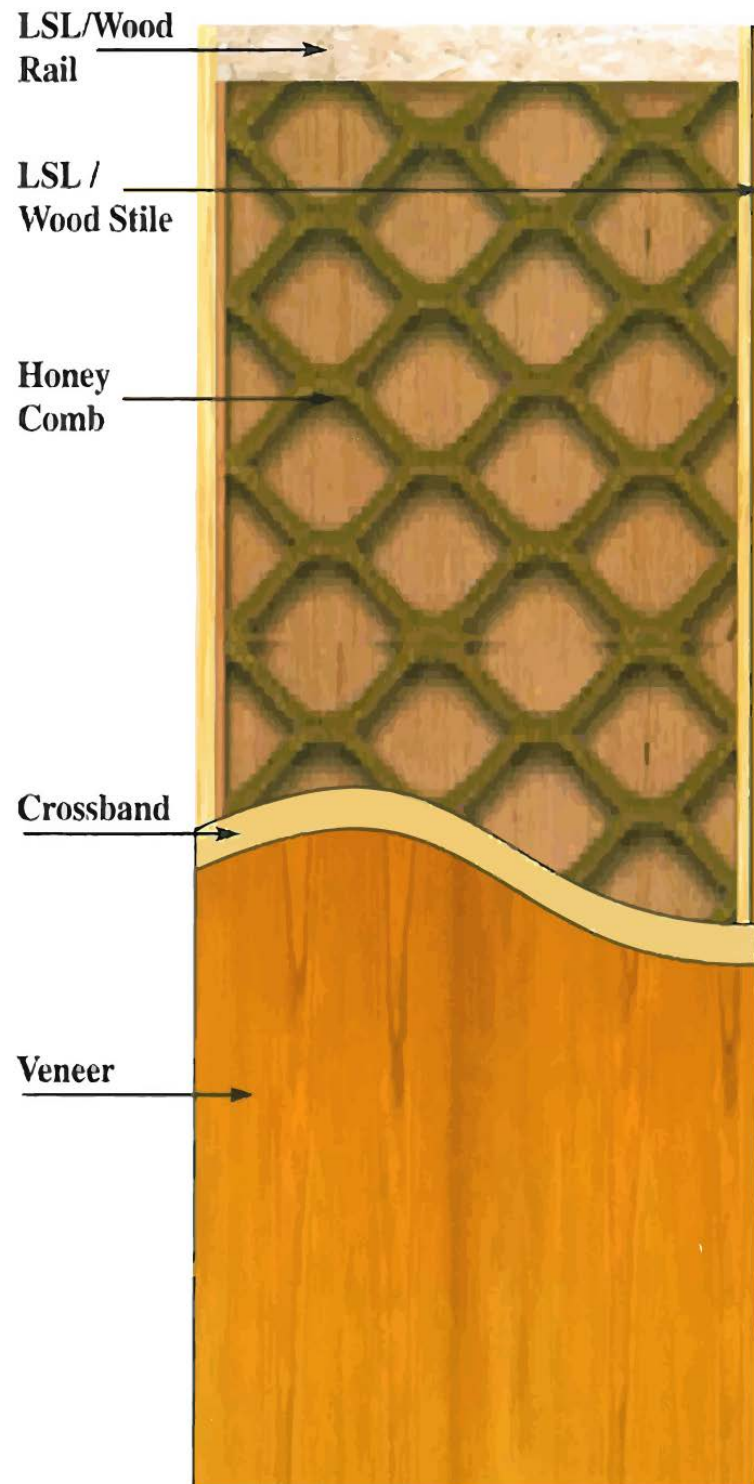

**Maximum Size:** 48" wide x 120" high, Pairs: 96" x 120"  
Larger doors (up to 60" x 144") for special use are also available. Call office for information.

**Transom:** Call office for details.

**Thickness:** 1.375", 1.75"

**Core:** Expanded 4"x4" corrugated cells

**Veneers:** Many species of natural wood veneer are available. WDMA 'A' grade, book & running match are standard. Primed Hardboard, Primed MDF, MDO and Decorative Plastic Laminate are also available.

**Stiles:** 1.25" softwood stiles are standard. Matching hardwood stiles with LSL backer (used for rigidity) are also available. All dimensions prior to factory trimming and prefitting.

**Rails:** 2.5" softwood or 2.5" LSL rails are standard mill option. Hardwood available upon request. All dimensions prior to factory trimming and prefitting.

**Finish:** TR-6 UV clear, custom stain to match color, or primed where applicable.

**Adhesive:** PVA meets or exceeds WDMA I.S. I-A for Type I flush wood door adhesive.

**Lites:** Wood lip or flush moulding wood vision and metal vision frames with 1/4" glass (all types).

**Blocking:** Top rail, bottom rail, stiles and special blocking for special hardware is available.

**Machining:** Bevel, hinge and lock, mortise lock, card lock, pivot and other hardware preps using state of the art CNC equipment.

**Standards:** Meets WDMA I.S. I-A and AWI

#### Environmental / LEED Credit Contributions (Optional)

- MR 4: Recycled Content
- MR 5: Regional Materials
- MR 6: Rapidly Renewable Materials (Bamboo Veneer Only)
- MR 7: Certified Wood (FSC Pure, FSC % AND FSC CW)
- IEQ4.4: Low Emitting Materials/ No added Urea Formaldehyde